


JET 2.0

Digital
Pressure Gauge

STANDARD version
Linearità - Isteresi
 $\leq \pm 0.20\%$
Linearity - Hysteresis

OPTION
Linearità - Isteresi
 $\leq \pm 0.10\%$
Linearity - Hysteresis



Certificato di Taratura ACCREDIA
A RICHIESTA

ACCREDIA Calibration Certificate
ON REQUEST

The JET series digital gauges are made according to the more modern technologies in order to provide a high level of reliability, versatility and inexpensiveness at the same time.

Its main applications include industrial fields where it is necessary to check processes or fields where a precision class better than **0,20%** (STANDARD version) or **0,10%** is required.

To increase the practicality and make the instrument completely autonomous, the pressure gauge is powered by an internal Li-Ion rechargeable battery that can be recharged directly by an USB port or by using a dedicated power supply.

In the programming menu, reachable through the keyboard, it is possible to adjust different functions such as: digital filter that allows to maintain the measurement steady even in presence of unsteady pressures, the display resolution which allows to increase the measurement at fixed steps (1, 2, 5, 10) and the measurement unit which can be changed into mbar, bar, kPa, MPa, psi, kg/cm2, mHg, mmHg, mH2O e mH2O.

Communication via the USB port and wireless (optional) and the functionality of Data Logger makes it particularly suitable for applications where it is necessary to elaborate the acquired measurements on a PC. The sensor, made entirely in stainless steel, is monolithic to ensure a long term high stability even in presence of highly dynamic pressures.

By selecting the TEMPERATURE function, the temperature of the fluid in contact with the pressure sensor will be displayed.

Main features:

- NORMALIZED PRESSURE FROM **100 mbar TO 3000 bar**
- PROGRAMMABLE RESOLUTION, DIGITAL FILTER and BAUD RATE
- ZERO and PEAK (Active in PRESSURE and VACUUM) functions
- USB SERIAL OUTPUT
- DATA LOGGER
- DISPLAY BACK LIGHT
- Measure of TEMPERATURE
- KEY BLOCK function
- ANALOG PRESSURE INDICATION ALWAYS ACTIVE (Bar Graph)
- **Wireless** TRANSMISSION OF THE MEASURE (on request)
- PRESSURE SWITCH TEST (on request)
- VACUUM Calibration (on request)



Main characteristics:

ACCURACY (linearity and hysteresis)	$\leq \pm 0,20$ % F.S. STANDARD version
ACCURACY (linearity and hysteresis)	$\leq \pm 0,10$ % F.S. HIGH ACCURACY version
ABSOLUTE PRESSURE (A) Zero at pressure to absolute vacuum	1 – 2,5 – 5 – 10 bar
RELATIVE PRESSURE (R) Zero at atmospheric pressure	100 – 250 - 500 mbar 1 – 2,5 – 5 – 10 – 20 – 50 – 100 bar 250-350 – 500 – 700 bar 1000 – 1500 – 2000 - 2500 – 3000 bar
RELATIVE VACUUM (V) Zero at atmospheric pressure	-1 ... 1 bar -1 ... 2,5 bar -1 ... 5 bar -1 ... 10 bar -1 ... 20bar
PRESSURE MEASUREMENT UNITS	bar – mbar – psi – Mpa – kPa - kg/cm ² mHg – mmHg - mmH ₂ O - mH ₂ O
TEMPERATURE UNITS	°C - °F
TEMPERATURE INDICATION a) Resolution b) Accuracy	0,1 °C ± 1 °C
SERVICE TEMPERATURE STORAGE TEMPERATURE RELATIVE HUMIDITY	0 ... +50 °C -10 ... +50 °C < 90 % not condensed
TEMPERATURE EFFECT (1°C) a) on zero b) on sensitivity	$\leq \pm 0,002$ % $\leq \pm 0,002$ %
INTERNAL RESOLUTION READINGS PER SECOND (0 filter) DIGITAL FILTER PROGRAMMABLE RESOLUTION PROGRAMMABLE ZERO FUNCTION PEAK FUNCTION USB PROGRAMMABLE BAUD RATE	16 bit 10 (100ms) 0 ... 99 1, 2, 5, 10 Active up to 100% F.S. Active in PRESSURE and VACUUM 19200, 9600, 4800
DATA LOGGER FUNCTION Max Storing Frequency Max storing pressure measures Max storing pressure+ temperature	1 measure for second 60.000 Records 30.000 Records
COMMUNICATION Max Distance	USB 2.0 5m
DISPLAY BACKLIGHT FUNCTION	13 mm (custom LCD) Programmable from 1s to 60s (0 disabled)
POWER SUPPLY AUTONOMY RECHARGE BATTERY TIME RECHARGE	RECHARGEABLE inside BATTERY ~ 3 months (Backlight and wireless disabled) Li-Ion 3.7V 1100mA/h ~ 8 hours (With PC or USB power supply)

Main characteristics:

MECHANICAL LIMIT VALUES:	
a) service pressure	100% F.S.
b) max. permissible pressure	150% F.S.
c) breaking pressure	>300% F.S.
d) highly dynamic pressure	75% F.S.
PROCESS COUPLING	1/2" G Male
RECOMMENDED GASKET	USIT A 63-18
TIGHTENING WRENCH	27 mm
TIGHTENING TORQUE	28 Nm
PROTECTION CLASS (EN 60529)	IP40
SENSOR EXECUTION MATERIAL	17-4 PH STAINLESS STEEL
CASE EXECUTION MATERIAL	ALUMINUM

Included accessories:

Shock-resistant silicon COVER.

Carrying case.

USB power supply (5VDC @700mA).

USB cable.

Carrying case.

CD with the User Guide and USB driver.

Nr. 2 mordant cones for high-pressure from 1000 bar to 3000 bar pressure gauges.

**Optionals:****SWITCH TEST** to test PRESSURE SWITCH.

CONTACT INPUT:

CONNECTOR MALE 2 pin:

POWER JACK 5,5 x 2,1mm



WARNING: SWITCH TEST option excludes WIRELESS option.

**Wireless TRANSMISSION**

RF FREQUENCY: 433MHz.

RF TRANSMISSION: 100m in Free Air.

MAX DATA TRANSMISSION RATE.

10Hz (10 transmission for seconds).








WARNING: When WIRELESS function is enabled, the USB serial transmission is not available.




Wireless Applications:

For wireless communication, you can use up to 5 possible receiving systems:

	<p>❶ Software WINWIMOD + RXWIMOD receiver module with USB interface (one per system) suitable for communicating with a PC and allowing to connect up to 32 JET pressure gauges or other AEP wireless transducers.</p>
	<p>❷ PC + RXWIMOD-USB receiver module with USB interface, with a simple communication protocol it allows a point to point connection with a JET pressure gauge. It is ideal for customers willing to develop a dedicated software.</p>
	<p>❸ WIP2Eplus panel indicator with wireless communication to connect 1, 2, 3 or 4 JET pressure gauge at the same time.</p>
	<p>❹ RXWIMOD-RS232C: RS232C receiver module for a point to point communication. Ideal for customers willing to interface the JET pressure gauge with a PLC or other dedicated electronic systems.</p>
	<p>❺ WISTAR handheld receiver: it allows you to connect up to 4 JET pressure gauges simultaneously. Ideal for customers willing to work in different locations.</p>

Accessories (purchased separately)

To complete the measurement system, AEP has developed the **Quick Analyzer Light** software that works directly with the JET manometer and supports the operator in the various test functions like, analysis, over time monitoring, data storage, management, Data Logger, transferring data to Microsoft Excel and so on ...

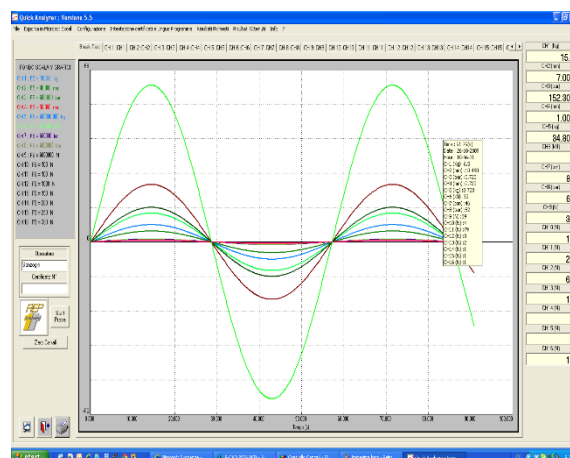

PresKAL: Software dedicated to the calibration and metrology confirmation of pressure gauges, pressure transducers, pressure transmitters and pressure switches.

Calibration Report.
Codice: **TRM**

ACCREDIA certificate.






Manual pressure generators used to compare the measurements between the sample pressure gauge and the instrument calibration.

Ideal for performing calibration and metrological confirmation of pressure gauges, pressure transducers, pressure transmitters and pressure switches.

DIMENSIONS (mm):

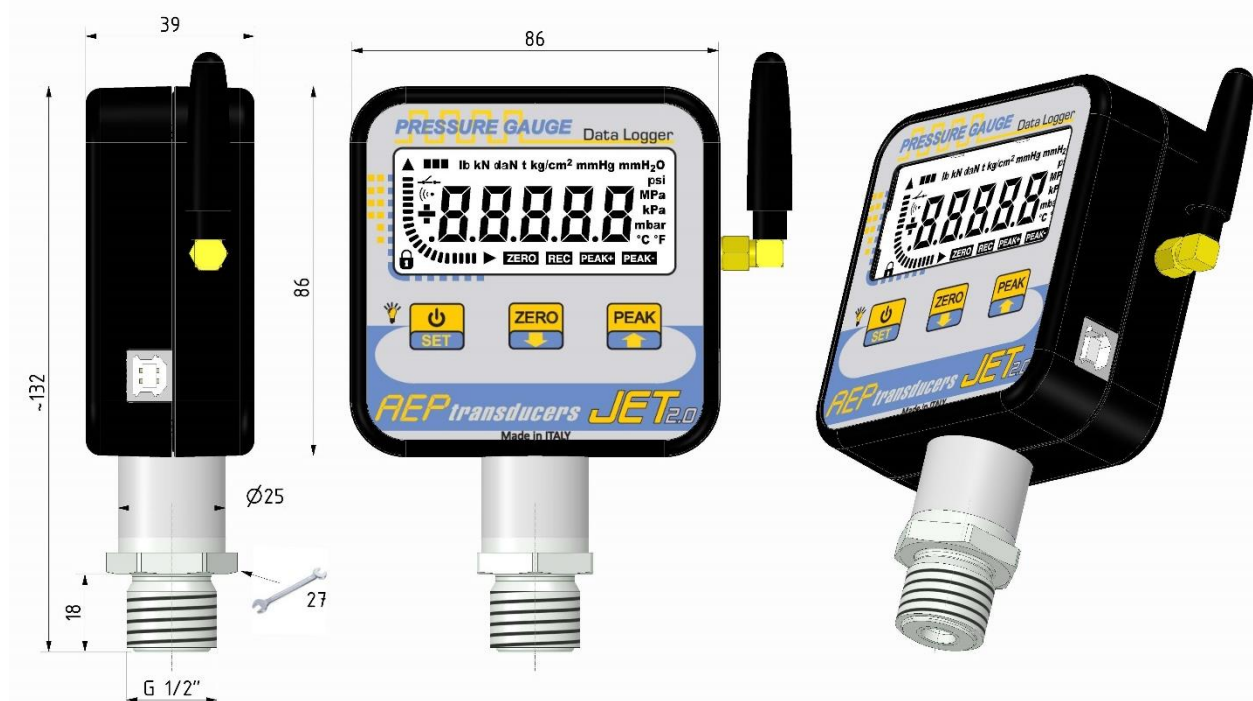

STANDARD indications:

	Nominal Pressure	Display	Resol.	Display	Resol.	Display	Resol.	Display	Resol.
TYPE ⁽¹⁾	bar	bar	bar	mbar	mbar	psi	psi	MPa	MPa
RV	0,1	0,10000	0,00002	100,00	0,02	1,4500	0,0002	0,01000	0,00002
RV	0,25	0,25000	0,00002	250,00	0,02	3,6200	0,0002	0,02500	0,00002
RV	0,5	0,50000	0,00002	500,00	0,02	7,2000	0,0002	0,05000	0,00002
ARV	1,0	1,0000	0,0002	1000,0	0,2	14,500	0,002	0,10000	0,00002
ARV	2,5	2,5000	0,0002	2500,0	0,2	36,200	0,002	0,25000	0,00002
ARV	5	5,0000	0,0002	5000,0	0,2	72,500	0,002	0,50000	0,00002
ARV	10	10,000	0,002	10000	2	145,00	0,02	1,0000	0,0002
RV	20	20,000	0,002	20000	2	290,00	0,02	2,0000	0,0002
R	50	50,000	0,002	50000	2	725,00	0,02	5,0000	0,0002
R	100	100,00	0,02	99998	2	1450,0	0,2	10,000	0,002
R	250	250,00	0,02	99998	2	3620,0	0,2	25,000	0,002
R	350	350,00	0,02	99998	2	5000,0	0,2	35,000	0,002
R	500	500,00	0,02	99998	2	7250,0	0,2	50,000	0,002
R	700	700,00	0,02	99998	2	10000	0,2	70,000	0,002
R	1000	1000,0	0,2	99998	2	14500	2	100,00	0,02
R	1500	1500,0	0,2	99998	2	21700	2	150,00	0,02
R	2000	2000,0	0,2	99998	2	29000	2	200,00	0,02
R	2500	2500,0	0,2	99998	2	36250	2	250,00	0,02
R	3000	3000,0	0,2	99998	2	43500	2	300,00	0,02

⁽¹⁾ A = Absolute R = Relative V = Vacuum**Purchase codes:**

TJET	Pressure	Full Scale				OPTION
	R = Relative	0B1	5B	250B	1KB5	W = Wireless
	A = Absolute ⁽²⁾	0B2	10B	350B	2KB	ST = Switch Test
		0B5	20B	500B	2KB5 ⁽²⁾	
		1B	50B	700B	3KB ⁽²⁾	
		2B5	100B	1KB		

Example: **TJETR50BST**

TDMMV	Relative VACUUM version
AC01	Accuracy 0,10%

⁽²⁾ ACCREDIA certification can NOT be performed by LAT 00120 Laboratory, on request it can be ordered to other Accredited Laboratories.



Measurements of WEIGHT, FORCE, PRESSURE and TORQUE since 1974

Dasa-Rägiſter
EN ISO 9001:2015
IQ-1100-01

41126 Cognento (MODENA) Italy Via Bottego 33/A Tel: +39-(0)59-346441 E-mail: aep@aep.it www.aep.it

In order to improve the technical performances of the product, the company reserves the right to make any change without notice.